

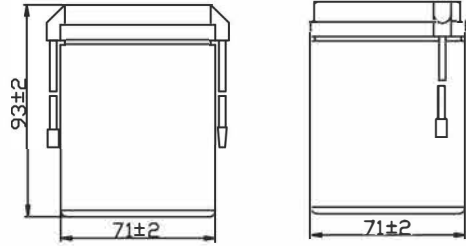


CHARACTERISTIC OF VALVE REGULATED FACTORY ACTIVATED LEAD ACID BATTERY

MODEL: 6N4-BS(MF)



Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Seal Glue
ABS	ABS	Cu	PbO ₂	Pb	AGM	dilute sulphuric acid	Rubber	Epoxy Resin

Parameter Chart

Volts	6V		
10 hours rate Capacity(25°C)	4Ah		
Dimension	Length	71±2mm(2.80 inch)	
	Width	71±2mm(2.80 inch)	
	Total height	93±2mm(3.66 inch)	
Terminal	Cu		
Weight±3%	0.75Kg(1.65 lbs)		
CCA(-18°C)	30A		


Retention of Charge Storage @25°C

1 month	97%		Directly Mounted
3 month	90%		Directly Mounted
6 month	80%	Current:0.4A	Constant Volts:14.8V Charging Hours:5H
12 month	60%	Current:0.4A	Constant Volts:14.8V Charging Hours:10H

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand

Discharge Characteristics 25°C

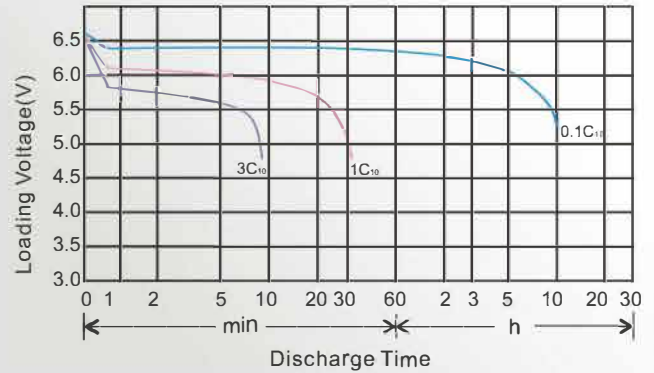

The relationship for OCV and Capacity 25°C

